


Mini UPS 不间断电源

UPS-12V-1A

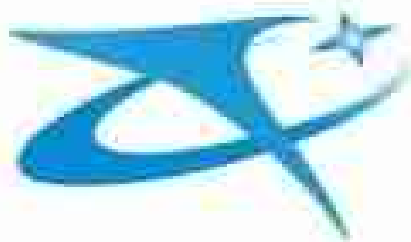


深圳市新鹏翔电子有限公司
SHENZHEN RICHROC ELECTRONIC CO.,LTD.


Mini UPS Product Specification Sheet

Mini UPS 不间断电源

Mini UPS Description:

Mini UPS uninterruptible power supply is a standby energy storage power supply. Used safe and environmental lithium cells, credible and stable PCB, trickle/constant-current/ constant-voltage lithium battery charging BMS, Created by high performance and efficiency DC-DC, boosting and switching circuit. This mini UPS with perfect over-charged, over-discharged, over-current and short-circuit protection.

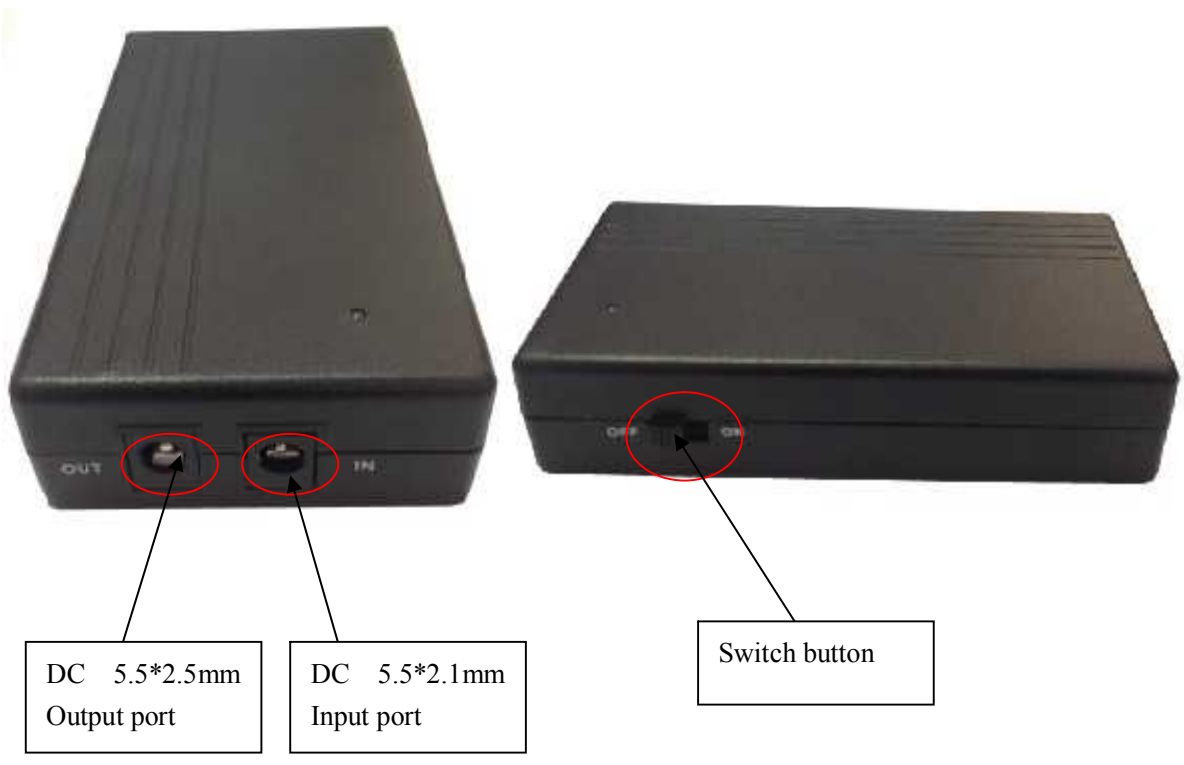

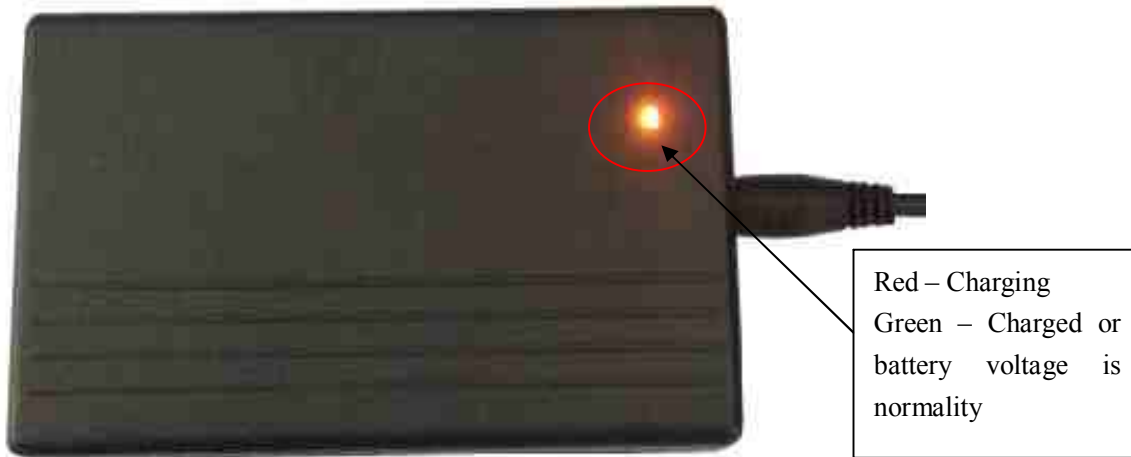


Mini UPS Application:

Smart 12V mini ups widely use for Router, Fingerprint attendance machine, Fire safety system, Security monitoring system, Wireless camera, CCTV camera , personal treatment system, Door security system, Personal data assistant, Emerge ncy lighting, Alarm system, Personal communication systems, Radio, Digital cam eras, Camcorders, Video camera, Bluetooth devices, CD players, MD players, Por table DVD, MP3 players, smart cards etc...

Mini UPS Feature:

- Rated Capacity: 14.8wh~44.4wh
- Input Voltage: $12V \pm 10\%$
- Input Current: $\leq 1000mA$
- Output Voltage: $12V \pm 10\%$
- Output Current: $\leq 1000mA$
- Working Temperature: $-20^{\circ}C \sim 65^{\circ}C$
- Net Weight: 153g~350g
- Volume: 111*60*26mm or 111*60*43mm

Function Diagram

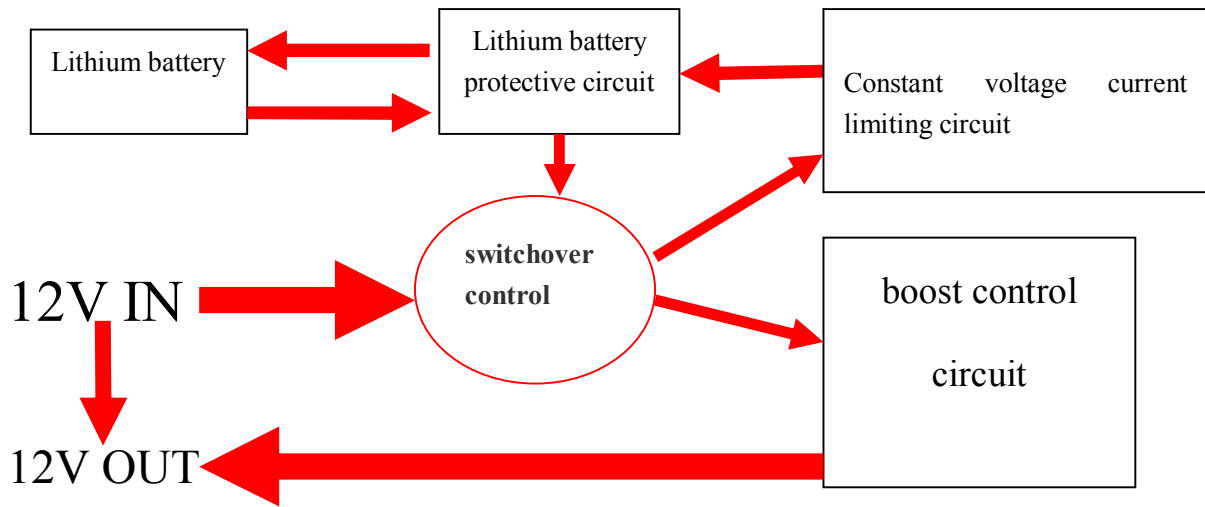

Electrical characteristics:

No.	Item	Technical Requirements	Unit	Remark
1	Rated input voltage	$12 \pm 10\%$	V	
2	Input voltage	$12 \pm 10\%$	V	
3	Charging current	300	mA	
4	Transfer efficiency	$\geq 85\%$		
5	Max output current	≤ 1	A	
6	No-load voltage range	$12 \pm 10\%$	V	
7	Output current range	≤ 1		
8	Max output voltage range	$12 \pm 5\%$	V	
9	Noise	≤ 120	dB	
10	Over-discharged protection(battery)	6.2	V	Over-discharged release 6.5V
11	Over-charged protection(battery)	8.2	V	Over-charged release 8.5V
12	With load current(battery)	≥ 3	A	
13	Output over-discharged protection	≥ 1.3	A	Locked

Mini UPS Working Condition:

- Charging: $0^{\circ}\text{C} \sim 55^{\circ}\text{C}$
- Discharging: $-20^{\circ}\text{C} \sim 65^{\circ}\text{C}$
- Storage 30days: $-20^{\circ}\text{C} \sim 45^{\circ}\text{C}$
- Storage 90days: $-20^{\circ}\text{C} \sim 35^{\circ}\text{C}$
- Should store the mini UPS under the pleasantly cool and arid place if long time don't use it. Otherwise poor performance may occur due to the poor connection with the equipment;

Attention:

- Do not expose the mini UPS in the rain or snow;
- Do not use or leave the mini UPS near a heat source as fire or heater;
- Do not connect the DC cable in wrong way;
- Do not use the wrong voltage adapter;
- Equipment voltage must matching with the mini UPS voltage
- If long time did not use this mini UPS, suggest 3~5months to charge it once

Shenzhen Richroc Electronic Co.,Ltd

Address: 6th Building, Rongtaijia Industrial Estate, Lisonglang Community, GuangMing New District, ShenZhen, Guangdong, China

Hotline: +86-400-777-1099

M.T.: +86-186 8874 4282

Tel: +86-755-27126881

Fax: +86-755-27126472

Email: info@chinarichroc.com

website: www.chinarichroc.com